

# ACE

## Powered Pallet Truck

**Capacity : 1.5 T – 2.5 T**

High Performance & rugged  
Powered Pallet Truck

**ACE** **INDIA'S NO. 1**  
MOBILE & TOWER CRANE CO.



*Nothing beats an **ACE***

Properties	Description		Unit	Technical Specifications				
	Model			EPT15	EPT20	EPT20H	RPT25	RPT25W
Identification	Type of Drive			Battery				
	Load Capacity		Kgs	1500	2000	2000	2500	2500
	Lift Height	H1	mm	200	205		200	
	Load Center	Q	mm	600				
	Travel Speed (Laden/Unladen )		Km/h	3.5/4	5/5.5		5/5.3	
	Lift Speed (Laden/Unladen )		mm/s	35/45	50/60		35/45	
	Lower Speed(Laden/Unladen )		mm/s	60/40	50/60		50/40	
	Gradeability(Laden/Unladen )		%	.5/7	.8/16		.5/9	
	Service Brake			Electromagnetic				
Power	Drive Motor		Kw	0.75	1.1		1.5	2.2
	Lift Motor		Kw	0.8	0.85		3	
	Battery Voltage /Capacity		V/Ah	24/65	24/80	24/160	24/210	
	Control System			Curtis Controller	Curtis/UK PG Controller		Curtis Controller	
	Battery box Size (L*W*H)		mm	224x135x178			790x210x576	
Other	Electric Power Steering (EPS)			N/A	Optional			
	Operator Platform			N/A	Optional		Standard	
	Protect Arm			N/A	Optional			
Wheels	Service Weight (apx.)		Kgs	260	320	380	700	
	Wheel Type			Polyurethane				
	Wheel base	Y	mm	1275	1320		1435	
	Size of Front Wheel $\phi$		mm	78*60	80*60		78*60	
	Size of Support Wheel $\phi$		mm	80*36	84*48		124	
	Size of Drive Wheel $\phi$		mm	210*75	230*70		230	
	Wheels Quantity			.1/2/2			.1/2/4	




EPT15



EPT20 & EPT20H



RPT25 & RPT25W

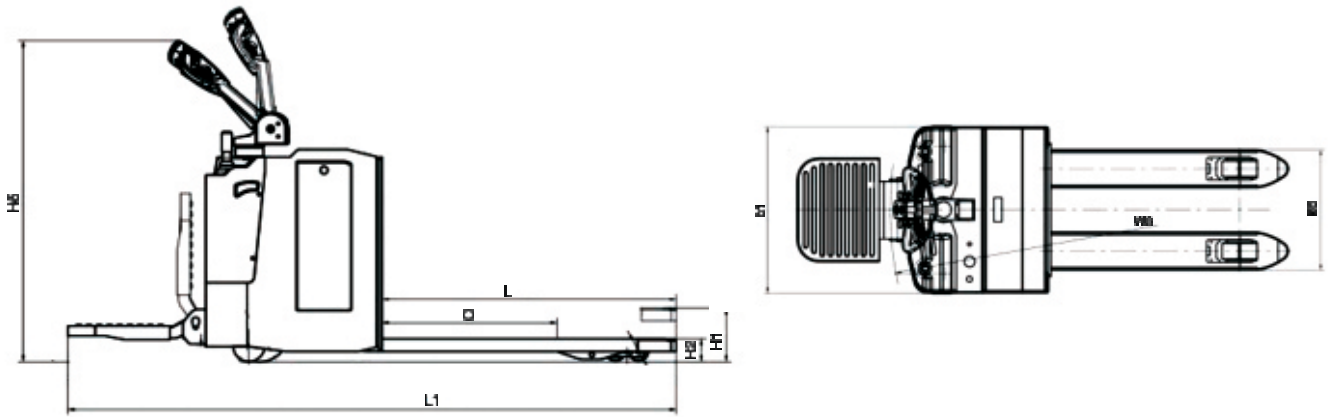


Properties	Description		Unit	STANDARD DIMENSIONS				
Dimension	Model			EPT15	EPT20	EPT20H	RPT25	RPT25W
	Lowered Height of Fork	H2	mm	85				
	Height of tiller arm in drive position	H5	mm	1150	785/1250	1030-1200		
	Overall Length	L1	mm	1610	1620	2375		
	Overall Width	b1	mm	560	680	780		
	Fork Length	L	mm	1150				
	Width Over Forks	b5	mm	540	550			
	Ground Clearance		mm	35			40	
	Aisle Width(Pallets 1000x1200 mm)	Ast	mm	1850	1980	2400		
	Aisle Width(Pallets 800x1200 mm)	Ast	mm	1730	1860	2300		
	Min Turning Radius	Wa	mm	1430			1720	

#### Standard Features :-


- Belly Button.
- Horn.
- Electronic braking System.
- Electronic Regenerative Brake.
- **B D I** (Battery Discharge Indicator).
- Lower & Lifting Switch.
- Battery & Charger.
- Climber Wheels.
- Emergency Cut-off Switch.

#### Optional Features :-

- Rider Platform.
- **EPS** System (Electric Power Steering).
- Safety Bar for Arm Protection.

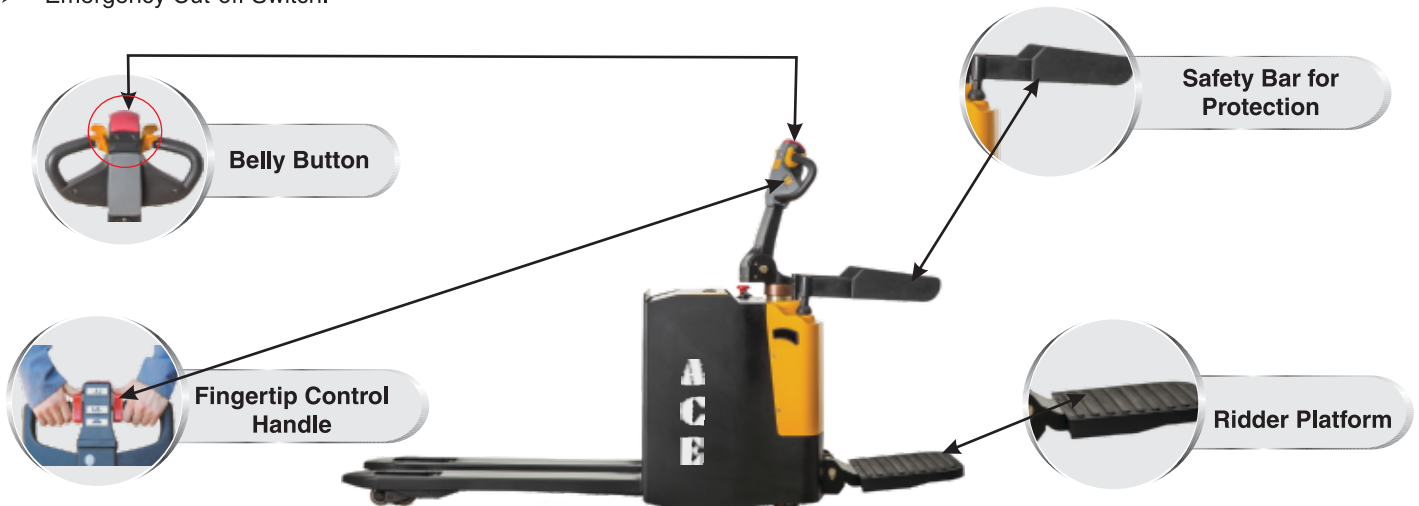

# ALL INDIA NETWORK

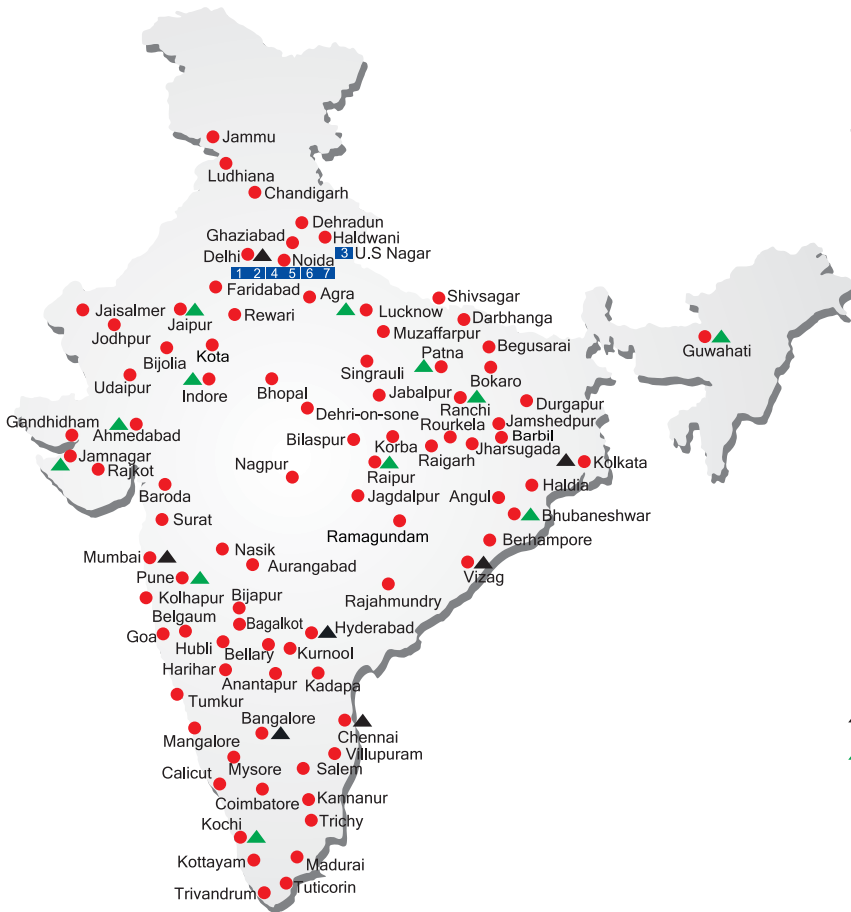

## SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Cochin.

**CUSTOMER CARE**  
**TOLL FREE No**  
**1800 1800 004**

- WORKS
- ▲ REGIONAL OFFICES
- ▲ AREA OFFICES
- SALES AND SERVICE DEALERS



**MARKETING H.Q.**  
 4th Floor, Pinnacle, Surajkund, NCR-121009  
 Ph. : +91-129-4550000, Fax : +91-129-4550022  
 E-mail: marketing@ace-cranes.com, forklifts@ace-cranes.com

**REGISTERED OFFICE**  
 Dudhola Link Road, Dudhola, Palwal-121102, Haryana  
 Ph.: +91-1275-280111 , Fax: +91-1275-280133  
 CIN : L74899HR1995PLC053860

**MUMBAI OFFICE**  
 31, "Kalpataru Court", Chembur, Mumbai - 74  
 Ph.: +91-22-25206846, 25207070, Telefax: 25207071  
 E-mail: acemumbai@ace-cranes.com

**KOLKATA OFFICE**  
 "Forma Towers" 84-A, Second Floor, AJC Bose Road, Kolkata - 14. Ph.: +91-33-65012050  
 E-mail: acekolkata@ace-cranes.com

**CHENNAI OFFICE**  
 1st Floor, "Alsa Regency", 165, Eldams Road, Alwar Pet, Chennai - 18  
 Ph.: +91-44-24314253, Telefax: 24314252  
 E-mail: acechennai@ace-cranes.com



## Action Construction Equipment Ltd.

Contact:



ACE reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by ± 5%. Accessories if shown are not part of the Standard Equipment.

